

OVERHEAD AIR CLEANERS



Eurovac Overhead Air Cleaners are ideal options for secondary source capture of particulate that may have escaped the primary source capture method such as vacuum MIG guns or fume arms.

- Available in either 2HP or 5HP
- Excellent two-stage filtration with four (4) aluminum mesh pre-filters to capture sparks and steel chips followed by four (4) secondary cartridge filters
- Available with optional final automatic pulse jet cleaning
- Constructed in 8-gauge to 14-gauge heavy duty steel

Effective Capture of:



Dust



Fumes





Airborne Pollutants

Technical Data:

Model No.	AIO-02F- N0400000	AIO-05F- N0400000
Horse Power	2HP	5HP
Voltage	208,240,460, 575	
Power	3 Phase 60 Hz*	
Airflow (max.)	1100 CFM	2340 CFM
Sound Level @ 5'	71 dB(A)	76 dB(A)
Filter Area	645 ft ²	
Weight	750 lbs.	1152 lbs.
Height	32"	44"
Width	45"	76"
Depth	25"	49"

*single phase available upon request

2HP Model

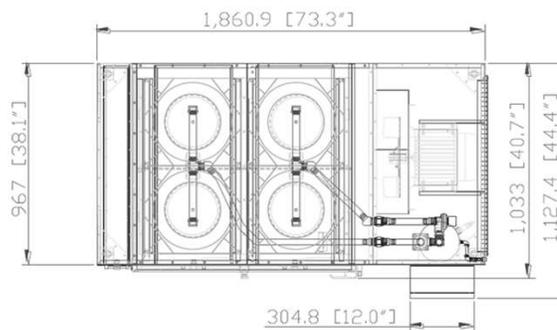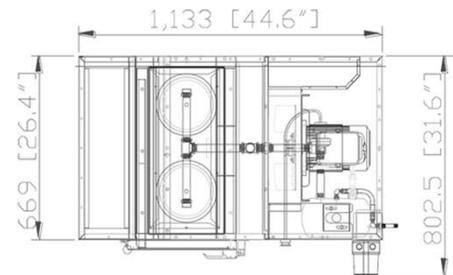

5HP Model

Compressed air
requirement: 90psi

For more information, contact Eurovac:

CANADA and USA
Toll-Free 800-265-3878 / Fax 416-744-8079
44 Milvan Dr., North York, ON M9L 1Z3
5927 Center Rd, Unit 3, Valley City, OH 44039
www.eurovac.com